



# LED 8PCS MOVING BAR BEAM LIGHT ( WHITE COLOR)

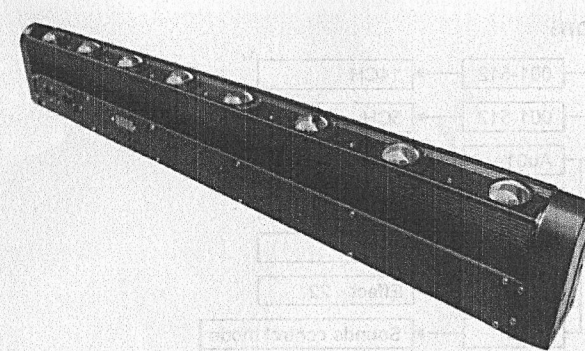

## USER MANUAL

CH	Function	Value
1	TR running	0-255
2	TR running speed	0-255
3	TR running speed	0-255
4	TR running speed	0-255
5	TR running speed	0-255

### 4. Channel function description

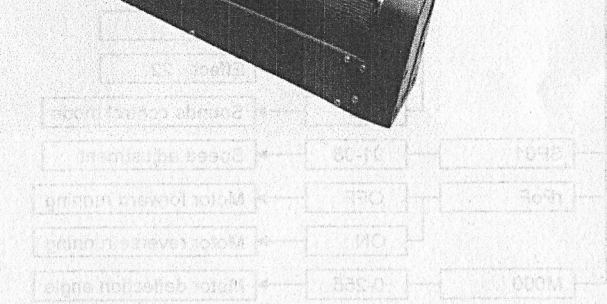

### 3. Menu instruction

- ☐ Menu
- ☐ down
- ☐ up
- ☐ Error

### 2. Button instruction

Technical Parameters:  
Voltage: 110V-240V 50/60Hz  
Lamp source: 8PCS 8W white beam LED  
Signal control: 5V1CH  
Beam angle: 10°  
TRIP: 180°  
Optional Mode: N.V. 50KGS  
Packing size:

14	Speed of Built-in effect	Speed adjustment of Built-in effect
13	Built-in effect	Built-in effect
12	Speed	Speed adjustment (from slow to fast)
11	BAR8 Dimming	Brightness adjustment
10	BAR7 Dimming	Brightness adjustment
9	BAR6 Dimming	Brightness adjustment
8	BAR5 Dimming	Brightness adjustment
7	BAR4 Dimming	Brightness adjustment
6	BAR3 Dimming	Brightness adjustment

CH	Function	Value
1	TR running	0-255
2	TR running speed	0-255
3	TR running speed	0-255
4	TR running speed	0-255
5	TR running speed	0-255

Description: In master mode, MODE function when M is 000, motor is the built-in program, when M is 1-255, it's the deflection angle.

## 1. Technical Parameters:

Voltage: 110v-240v, 50Hz-60Hz

Lamp source: 8pcs 8W, white beam LED

Signal control: 5 /14CH

Beam angle: 10°

Tilt: 180°

Operational Mode: DMX512, Master-slave, Auto-run, Sound control.

N.W: 5.0KGS

Packing size: 110.2\*15\*21.5cm

## 2. Button Instruction



Menu



down




up



Enter

## 3. Menu Instruction:

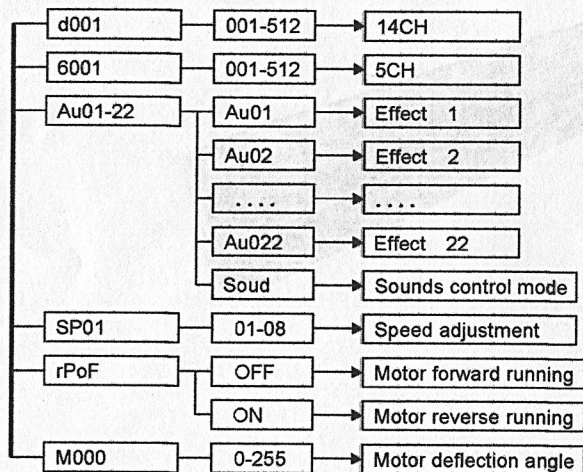

## 4. Channel function description

### 14Channel

CH	Function	Value	
1	Tilt running	0-255	Upward adjustment is forward running, Downward adjustment is reverse running
2	Tilt running speed	0-255	Speed adjustment
3	Total dimming	0-255	Overall brightness adjustment
4	BAR1 Dimming	0-255	Brightness adjustment
5	BAR2 Dimming	0-255	Brightness adjustment

6	BAR3 Dimming	0-255	Brightness adjustment
7	BAR4 Dimming	0-255	Brightness adjustment
8	BAR5 Dimming	0-255	Brightness adjustment
9	BAR6 Dimming	0-255	Brightness adjustment
10	BAR7 Dimming	0-255	Brightness adjustment
11	BAR8 Dimming	0-255	Brightness adjustment
12	Strobe	0-255	Strobe adjustment(from slow to fast)
13	Built-in effect	Built-in effect	
14	Speed of Built-in effect	Speed adjustment of Built-in effect	

### 5Channel

CH	Function	Value	
1	Tilt running	0-255	Upward adjustment is forward running, Downward adjustment is reverse running
2	Tilt running speed	0-255	Speed adjustment
3	Total dimming	0-255	Overall brightness adjustment
4	Built-in effect	Built-in effect	
5	Speed of Built-in effect	Speed adjustment of Built-in effect	

Description: In master mode, M000 function, when M is 000, motor is the built-in program, when M is 1-255, it is the deflection angle